
# T41D Jockey Pump Submittal Sheet **Performance Curve**

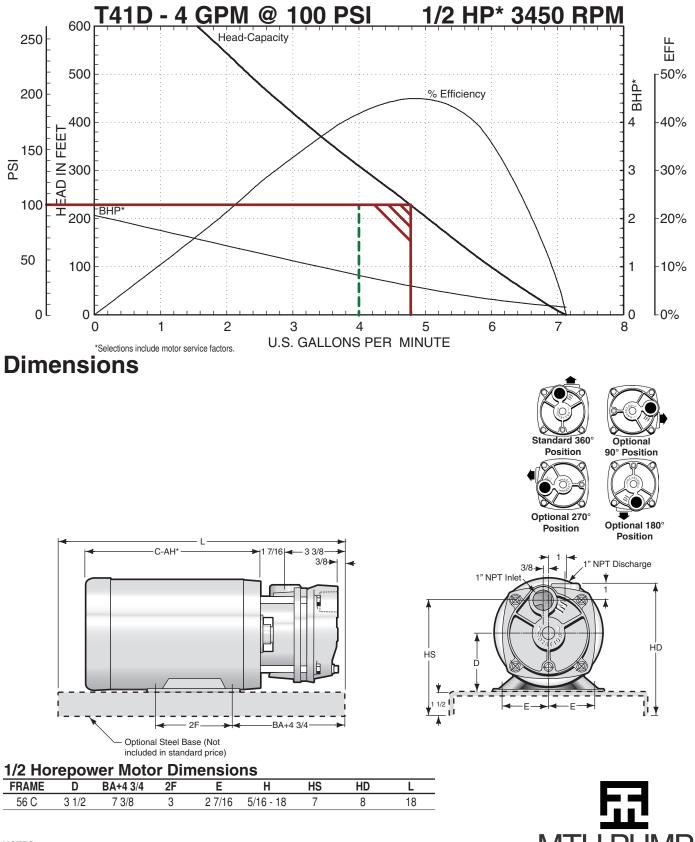

NOTES

All dimensions in inches. May vary ± ¼ inches. Not for construction purposes unless certified. \*See motor dimensions for "C-AH" dimension (Varies depending on motor enclosure).

© Copyright 2019 MTH Tool Company, Inc.

401 West Main Street • Plano, IL 60545-1436 Phone: 630-552-4115 • Fax: 630-552-3688 Email: SALES@MTHPUMPS.COM http://WWW.MTHPUMPS.COM Dated February 2019

### **Horizontal Close Coupled Design Specifications**

The contractor shall furnish (and install as shown on the plans) an MTH T41 Series horizontal close coupled regenerative turbine type pump model T41D size 1" by 1" of bronze fitted construction. Each pump shall have a capacity of \_\_\_\_\_GPM when operating at a total PSI of \_\_\_\_\_\_. Suction pressure will be \_\_\_\_\_feet with a liquid temperature of \_\_\_\_\_\_°F.

The pump is to be furnished with a mechanical seal with stainless steel metal parts, Buna elastomers, ceramic seat and carbon washer. A stainless steel shaft or a shaft sleeve shall be furnished in pumps up to three horsepower and a 316 stainless steel shaft in pumps five horsepower and larger.


The pump casing shall be vertically split two piece, end suction and top discharge with water passageways accurately machined into each piece. The impeller shall be hydraulically self centering and no external adjustment shall be necessary.

The pump shall be close coupled to a standard NEMA "C" face 1/2 HP \_\_\_\_phase \_\_\_\_Hertz \_\_\_\_voltage \_\_\_\_RPM horizontal open drip proof motor. The motor shall be sized to prevent overloading at the highest head condition listed in the specifications.

#### **1-Phase Bills of Materials**

Item ID: 8C-T410DBFSCSXSAXX-CF51AD				
Item Description: T410D BF T21 Cer C/C 1/2 HP 1/60/115/208-230V 3450 RPM ODP Motor				
Item Number	Description	Qty Needed		
12-1068-01-457	Type 21 Rotating Element .875" Buna Seal	1		
1-2215-0D-543	T41 D Motor Bracket, Teflon Coated	1		
2-2205-0D-543	T41 D Cover, Teflon Coated	1		
17-1390-01-181	Sleeve, Shaft, Brass	1		
15-1168-01-104	Setscrew, 18-8 SS	2		
125-1282-01-592	Seal Seat, 0.875 Ceramic, O-Ring Style	1		
22-4265-01-101	Plug, 1/8 SAE	1		
	Oring, -218 Buna Included w/ Seat	1		
7-3970-01-457	O Ring, -902 Buna (Drain Plug)	1		
	O Ring, -159 Buna	1		
	Motor, 56C-Face, DLT Electric, 1/3 Hp, 1 Phase, 2 Poles, ODP CC	1		
19-1997-01-080	Machine Bolt, 3/8-16 + 4"L	4		
23-1487-01-080	Key, Sleeve	1		
11-2225-0D-206	Impeller, T41D Bronze	1		
23-1022-01-104	Drive Key, 316SS	1		
14-1049-01-080	Drive Collar	1		

### **1-Phase Motor Nameplate**

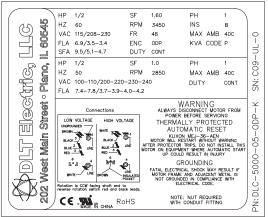

## **3-Phase Bills of Materials**

Item ID: 8C-T410DBFSCSXSAXX-CF59ED				
Item Description: T410D BF T21 Cer C/C 1/2 HP 3/60/208-230/460V 3450 RPM ODP motor				
Item Number D	Description			
12-1068-01-457 Ty	ype 21 Rotating Element .875" Buna Seal	1		
1-2215-0D-543 T4	41 D Motor Bracket, Teflon Coated	1		
2-2205-0D-543 T4	41 D Cover, Teflon Coated	1		
17-1390-01-181 SI	leeve, Shaft, Brass	1		
	etscrew, 18-8 SS	2		
125-1282-01-592 Se	eal Seat, 0.875 Ceramic, O-Ring Style	1		
	lug, 1/8 SAE	1		
135-1179-01-457 O	ring, -218 Buna Included w/ Seat	1		
7-3970-01-457 O	Ring, -902 Buna (Drain Plug)	1		
	Ring, -159 Buna	1		
FRC-1250-05-ODP 1/	/2 HP 3/60/230/460V 3450 RPM ODP Bluffton [3/50/190/3802880]	1		
19-1997-01-080 M	lachine Bolt, 3/8-16 + 4"L	4		
23-1487-01-080 Ke	ey, Sleeve	1		
	npeller, T41D Bronze	1		
	rive Key, 316SS	1		
14-1049-01-080 D	rive Collar	1		

#### **3-Phase Motor Nameplate**

BLUFF 410 E. Sp Bluffton,		TOR	Blank MOD 1303007150 REF 1250050DP
60.HZ HP 1/2 RPM 3450 V 208-230/460 FLA 1.8-1.8/.9 SF 16 SFA 2.6-2.6/1.3 Brek	50.HZ 1/2 2850 190-220/380-440 26-28/1.3-1.4 1.0 Blank	FR 56C MANNE 40 ENC DP TRATE CONT KONNE L DATE	PH 3 INS B
LOW VO L1 $\longrightarrow 1^7$ L2 $\longrightarrow 2^8$ L3 $\longrightarrow 3^9$ HIGH VO L1 $\longrightarrow 1^7$ L2 $\longrightarrow 2^8$ L3 $\longrightarrow 3^9$ L3 $\longrightarrow 3^9$	5	prov fire I Z	WARNING - Always disconned motor from power supply before serving. MOTOR CONTAINS NO THERMAL PROTECTOR- rate over current protection must be ided to prevent burnout and possible maard from overload or stalled motor. GROUNDURG. Frata electrical shock may result if motor frame and gincent mela are not grounded in compliance with stedrical code.

ATT PURPER AND A CONTRACT OF C