

# Standard Products Guide

## Regenerative Turbine Pumps

## Centrifugal Pumps



*Manufacturing MTH Pumps  
in the USA since 1965*



**MTH PUMPS**  
[www.MTHPumps.com](http://www.MTHPumps.com)


## Single Stage Close-coupled Turbine Products

MTH Pumps is a commercial and industrial pump manufacturer serving a wide variety of markets and industries including boiler feed, condensate return, chillers / temperature controllers, water services, refrigeration, petroleum, as well as many chemical process applications. Our Standard Product lines include mechanically sealed regenerative turbines for low flow, high


pressure, applications (up to 1000PSI / 150GPM) as well as two lines of small centrifugals (155PSI / 230GPM). All pumps are tested before shipment. We also offer custom engineered products such as sealless canned versions of our turbine product lines. In fact, to our knowledge, MTH Pumps offers the broadest line of regenerative turbine and sealless canned pump products

available in the world. We also have extensive experience in custom designing pumps for specific OEM needs where high reliability and cost reduction are a primary concern. If you don't find what you are looking for in the Standard Products you see within this brochure, please consult our website at [WWW.MTHPUMPS.COM](http://WWW.MTHPUMPS.COM) or contact us at [SALES@MTHPUMPS.COM](mailto:SALES@MTHPUMPS.COM).

### P31-T31 Performance Range

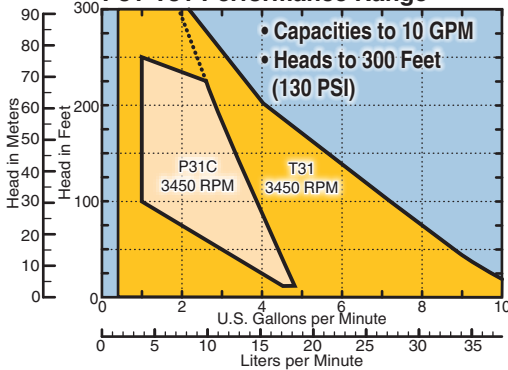

### E41 Performance Range

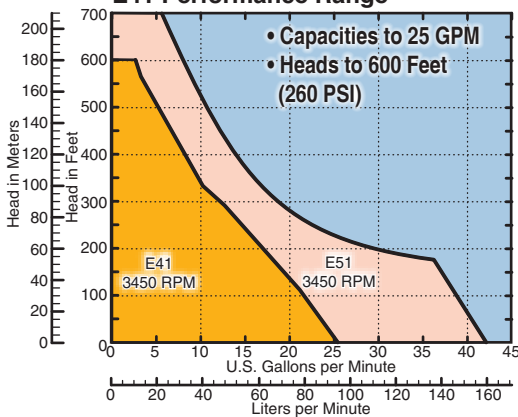

## T31 • E41 • E51 Series



The **T31, E41, and E51 Series** close-coupled regenerative turbine pumps utilize our custom manufactured dual face 3450RPM D3 motors that incorporate a 304 stainless steel shaft and heavy-duty bearing. The stainless steel shaft eliminates the necessity of a shaft sleeve, thereby reducing the parts count and simplify-

ing OEM maintenance and servicing procedures and creating a more compact design. All D3 motors also feature a two-pole 50/60Hz rating, as well as UL and CE approvals useful for OEM's with worldwide customers. The three-phase versions of the D3 motors feature a small footprint, 48 frame TEFC enclosure and a range

from 1/3 to 3HP. The single phase D3 motors have an equally small footprint, ODP enclosure and a range from 1/3 to 2HP. The E41•E51 Series are also available in a close-coupled vertical flange mount configuration. Standard construction includes a bronze impeller, cast casing and motor bracket, a carbon/ceramic seal, and buna elastomers.

### OPTIONAL FEATURES

Construction materials of all bronze, stainless steel, and RoHS compliant are available. All iron is available on the E41•E51 Series as well. Special seal materials, elastomers, and internal seal flush are available for temperature and fluid compatibility.

## P31 Series



MTH **P31 Series** regenerative turbine pumps handle capacities up to 4 1/2 gallons per minute and 250 feet of head at temperatures up to 250°F. These units feature an adjustable casing to provide variable performance output or readjustment of worn internal clearances to extend service life. Its compact size and top suction and discharge allow for installation in tight enclosures. These units feature stainless steel casings. Standard construction includes a bronze impeller, a carbon/ceramic seal, and Viton elastomers. All P31 pumps can mount onto ultra com-

compact 36 Frame UL and CE approved motors, as well as our dual face D3 motors. Optional motors with higher horsepower, solid state starting, TEFC enclosures, and 3 phase capabilities are also available.

### OPTIONAL FEATURES

All Stainless Steel and RoHS compliant versions are available. A built-in relief valve is also available. The relief valve temporarily protects against dangerous over-pressure. All relief valves are pre-set at the factory to your specifications (60 to 100 psi range available).

# MTH PUMPS Single Stage Turbine Products

## T41 • T51 Series

MTH T41 and T51 Series regenerative turbine pumps, offer excellent performance in low flow, high head, clean fluid applications. Additional mounting and motor options for extended ranges and more specialized services are also available. Like all of our turbine products, these units combine the latest concepts in turbine hydraulic design optimization, with computer controlled manufacturing, to produce high efficiency and performance with low NPSH requirements. These easily serviceable pumps provide long life in clean fluid applications featuring a floating, self-adjusting impeller design with no metal to metal contact. This design is especially suited to high purity and low fluid lubricity applications where the carbon vanes and metal gears of many positive displacement pumps are troublesome. Regenerative turbine impellers also effectively handle high percentages of entrained vapor for DAF applications and to help reduce the possibility of vapor lock. All pumps are 100% tested to guarantee performance prior to shipment.

### CONSTRUCTION


Standard construction is cast iron bronze fitted. Internal wetted cast iron parts are Teflon coated and the double-sided bronze impeller is hydraulically balanced to minimize wear.



T Series pumps offer a replaceable shaft sleeve for maximum fluid compatibility. Standard seals are rated for 230°F Water.


### OPTIONAL FEATURES

Construction materials of all iron, all bronze, stainless steel, and RoHS compliant are available. Pumps can also be pedestal mounted for flexible coupling drive by almost any type of motor. Special seal materials, elastomers, and internal seal flushes are available for temperature and fluid compatibility. Optional vent ports are available on T51 Models. Sealless canned ST41 and ST51 Series are also available.

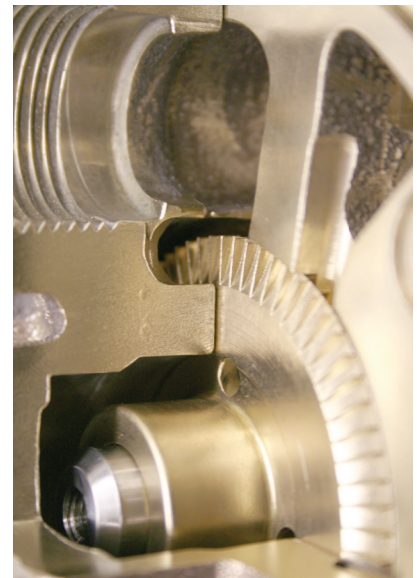

T Series Pumps Available in All Bronze

## T41 • T51 Mounting Options

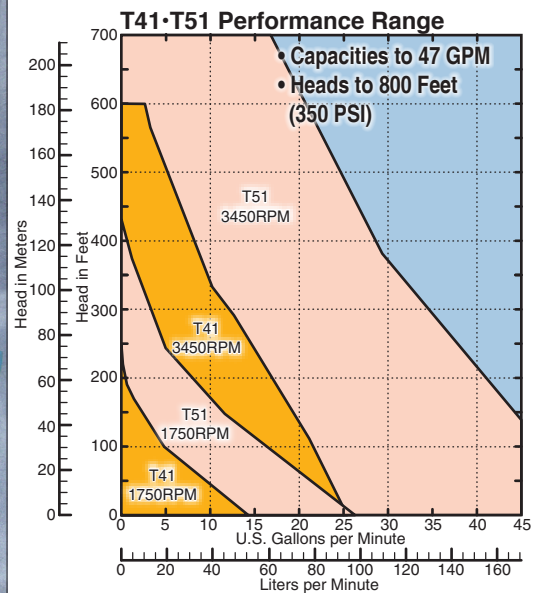


# MTH PUMPS

## High Pressure Multi-stage Turbine Pumps

### M50 • L50 Series

MTH M50 and L50 Series Regenerative Turbine Pumps are multi-stage versions of the popular T51 Series and are ideally suited for low flow applications (2 to 38 GPM) requiring higher discharge pressures than those available from a single stage unit. Head pressures to 2300 feet are available in a five stage M55. Both the M50 and L50 Series are available in close coupled, vertical base mount and horizontal pedestal base mounted configurations. For applications with low vapor pressure fluids, or where NPSH availability is low, the L50 Series adds a low NPSHR centrifugal inducer stage to help feed the high pressure regenerative turbine stages. Standard 56C face motors are used up to 3 HP. Vertical base mount pump motors 5 HP and larger are TEFC enclosure. Pedestal base mount pumps utilize standard rigid base motors.

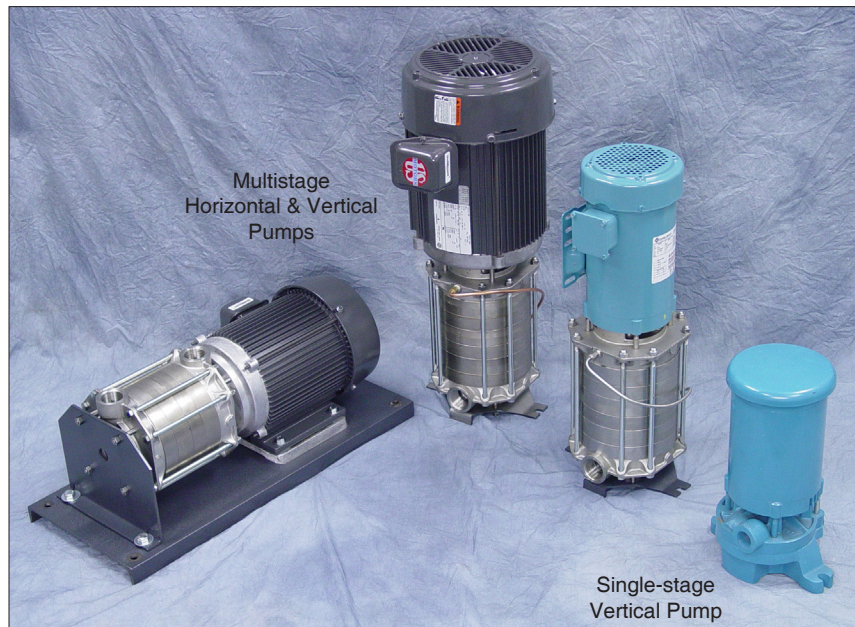

From Left to Right: M52 Close-coupled Horizontal Base Mounted Pump w/C30 Motor, M53 Close-coupled Vertical Pump w/C30 Motor, M53 Close-coupled Vertical Pump w/C3 Motor, M51 Close-coupled Vertical Pump w/56C Motor

#### CONSTRUCTION

Standard construction is cast iron bronze fitted. Iron parts are Teflon coated. Impellers are bronze, hydraulically balanced, and self-centering to minimize side wear. Pump shafts are 416 stainless steel, while interstage bushings are carbon/graphite in a stainless steel cartridge. Pump bearing pedestal and motor are furnished with permanently lubricated sealed ball bearings for maintenance free service.

“O” ring gaskets are utilized to assure sealing and for ease of maintenance. Standard mechanical seals are rated for 230°F water operation and furnished with a flush line on multi-stage pumps. All pumps are 100% tested to verify performance prior to shipment.

#### OPTIONAL FEATURES

All iron, all bronze, cast stainless steel, and RoHS compliant construction are available from stock. Buna, EPR, Viton,


Neoprene and Teflon “O” ring and seal elastomer materials, as well as silicon carbide, tungsten carbide, ni-resist, and graphite loaded silicon carbide seal seats are also available. For sealless canned versions of these units, see the SM50 and SL50 Series.

#### L50 SERIES INDUCER

**L50 Series** inducer style pumps are designed specifically for applications where the net positive suction head available at the pump inlet is limited, such as in boiler feed water deaerator and refrigerant services. A centrifugal style impeller with low NPSH characteristics is utilized to lower the inlet head requirements.

This first stage impeller is used in conjunction with a multi-vane diffuser to provide the second stage regenerative turbine with adequate suction head.

L50 Series pumps can effectively handle NPSH availability as low as two feet, depending on the model and capacity.

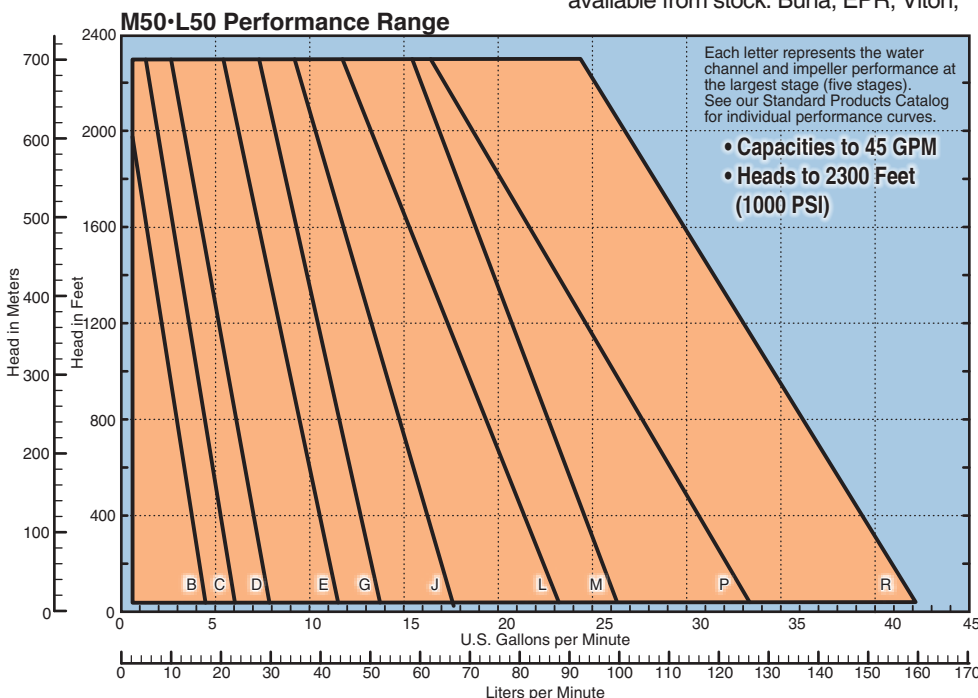


# MTH PUMPS Turboflex Multi-stage Turbine Pumps

MTH Turboflex radially split foot mounted **100 and 200 Series** regenerative turbine pumps offer the high pressure characteristics of a multi-stage pump (heads up to 1150 feet) at flow ranges beyond those available in any of our other regenerative turbine products (up to 150 GPM). These heavy duty industrialized units also utilize the latest concepts in regenerative turbine hydraulic design, and benefit from tightly computer controlled manufacturing techniques. Turboflex pumps feature 1750 RPM motors to deliver long life and high efficiency performance with low NPSH requirements. For applications with NPSH availability as low as one foot, the 200 Series adds a centrifugal style inducer in front of the turbine stages. Like our other turbine products, the multi-vane turbine impellers handle entrained vapors to help reduce the possibility of vapor lock in boiler feed water, ammonia, and other refrigerant services.

## CONSTRUCTION

Standard construction is cast iron bronze fitted. Suction and discharge covers, seal cups, bearing arms and casing channel rings are cast iron material. Pump shaft is high strength 416 stainless steel. Impeller is cast bronze, hydraulically



## 140 • 240 • 180 • 280 Series

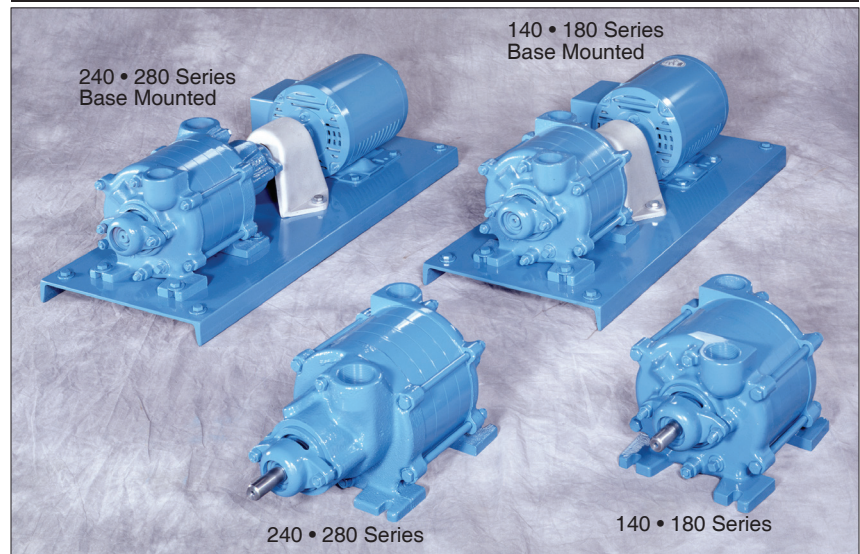

balanced and self-adjusting for longer life. Sealed ball bearings are permanently lubricated for maintenance free operation. "O" ring gasketing is used to assure sealing and for ease of maintenance. Standard mechanical seals are rated for 230°F water operation. All units are flexible-coupled for easy service and motor flexibility. Pumps are 100% tested to guarantee performance prior to shipment.

& tungsten carbide seal seats, EPR/Neoprene/Teflon/Viton "O" ring gasket materials, external seal flush, and balanced or double mechanical seals are also available. For low NPSH/low vapor pressure fluid service, the 200 Series adds an inducer stage. Reduced NPSHR is obtained by using a centrifugal inlet impeller along with a multi-vane diffuser to provide the second stage regenerative turbine with adequate suction head. NPSHR is reduced to as low as one foot on 240 • 280 Series pumps and as low as two feet on 250 • 260 • 270 Series pumps. Sealless canned models will be available in the future.


## 100 • 200 Series Performance Range

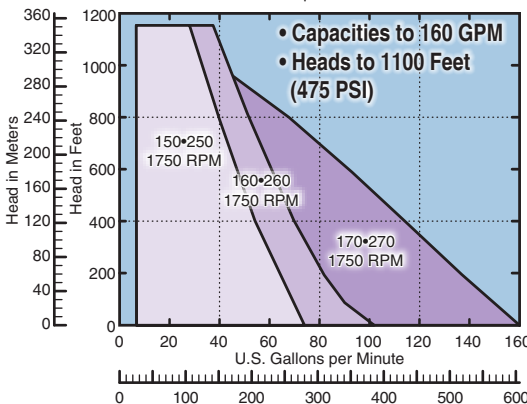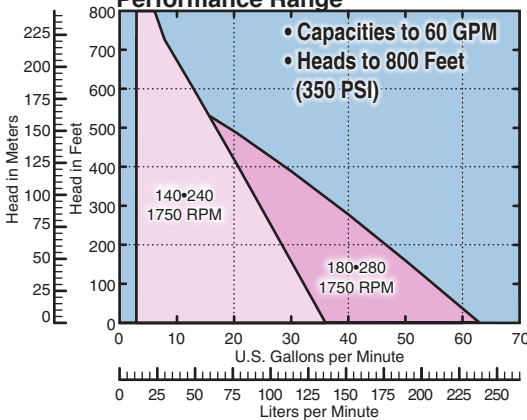

## OPTIONAL FEATURES

Turboflex pumps are also available in all iron, all bronze, stainless steel, and RoHS compliant construction. Silicon


## 150 • 250 • 160 • 260 • 170 • 270 Series

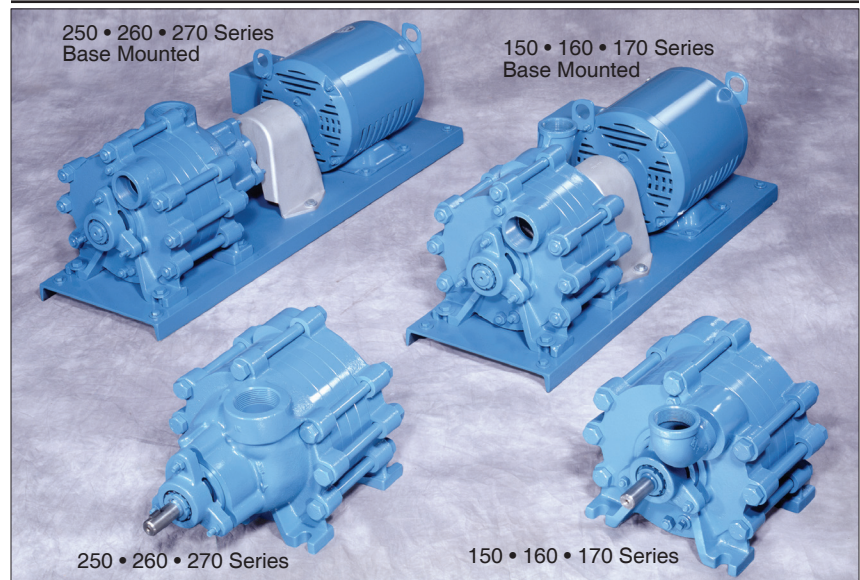


# MTH PUMPS Compact Centrifugal Pumps

## C41 • C51 • C61 Series

For customers whose needs fall into the lower pressure ranges, MTH is proud to offer two lines of compact centrifugal pump products to complement our higher pressure regenerative turbines. Towards this end, MTH has developed the high quality, 4", 5", and 6" **C Series**, semi-open impeller, all stainless steel centrifugal pumps. These units are cost competitive against stamped stainless steel centrifugal pumps, but with a heavy duty cast impeller and casing design. Each pump model is pre-trimmed and selected to provide the best pressure and capacity for a given impeller and motor horsepower combination (up to 3HP and 100GPM). Adjustment screws on the C Series casing take advantage of the semi-open impeller design by

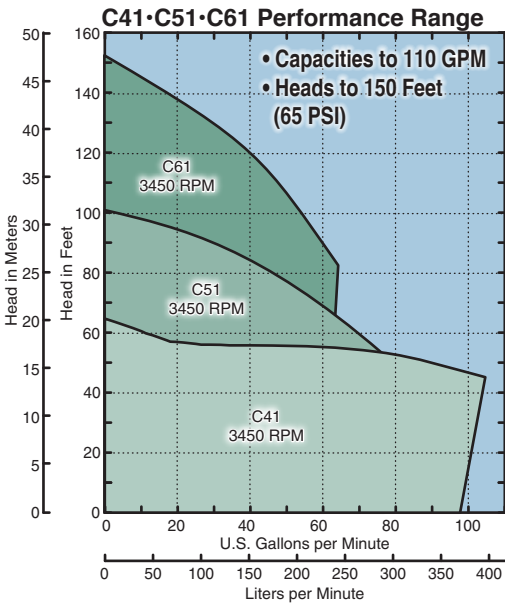

providing the capability to occasionally renew pump performance by tightening internal clearances and minimizing losses developed from normal wear. The C Series standard construction is investment cast stainless steel casings and impellers with Viton elastomers.

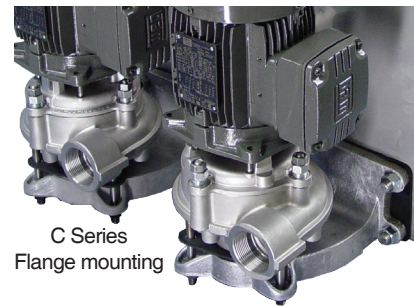


**OPTIONAL FEATURES**  
C Series and DC10 Series centrifugal pumps both offer a variety of seal and elastomer options.

## 12V DC DC10

- 100% Solid Stainless Steel Pump Components  
Corrosion Resistant Pump • No Plastic • Freeze Tolerant
- Open Face Impeller Design
- 1 HP Totally Enclosed Motor  
No Fan to Cause Problems
- Long Lasting, Dry-Run Seal
- Flow Rates to 25 GPM
- Pressure to 40 PSI
- End Suction with Top, Bottom, or Side Discharge
- Other Pump Sizes and Materials Available

The DC10 pump from MTH Pumps is a 12V DC washdown duty pump that provides superior cast 304SS construction and is made to exceed OEM specifications for Portable Restroom Service Trucks. MTH DC10 pumps can replace original units on any truck and is an ideal pump for filling sinks, recharging toilet tanks, and cleaning portable restrooms. The large seal chamber for the mechanical seal box provides a wide fluid passage area for maximum cooling of the seal faces and allows debris and gases to be flushed away. The DC10 is designed to produce up to 25 GPM and reach pressures to 40 PSI.



# MTH PUMPS Engineered Products and Accessories



The mission of MTH Pumps is to design, develop, and produce pumping products to fit applications in which they are technically correct solutions that also address the peripheral needs of the customer. To this end, the company has endeavored to become

highly vertically integrated to maximize the flexibility and agility of the company to meet product and customer needs. To facilitate the engineering centered nature of the company, MTH has acquired a number of resources needed to bring it to the leading edge of engineered product design and development. MTH utilizes highly



experienced design engineers, solid modeling CAD software, rapid prototyping equipment, its own pattern and mold making shop, its own foundry and fabrication shop, state of the art auto-loading CNC machining equipment, and a wealth of inspection and testing equipment to rapidly design and develop the right solution for the job. In many cases, the design of custom pumps and accessories has netted a significant cost savings to the customer over the use of




standard off the shelf products. Whether the customer is looking for a slight modification to one of our standard products, a totally new pump design, or a completely different kind of product, MTH has the broad range of resources required to complete the task.

In the area of pump design, MTH has entered into the sealless pump market with sealless

## MTH Pumps In-house Capabilities Include:

- Creative Engineering services
- Solid modeling design
- Rapid Prototyping tools
- Pattern and mold making shop
- Bronze and Aluminum casting foundry (casting services inquiries invited)
- Highly automated state-of-the-art CNC machine shop
- Custom designed assembly/testing equipment and facilities
- Customized packaging and labeling capabilities
- Large finished inventory capacity for high availability and rapid shipment
- Dedicated Service and Repair Facility

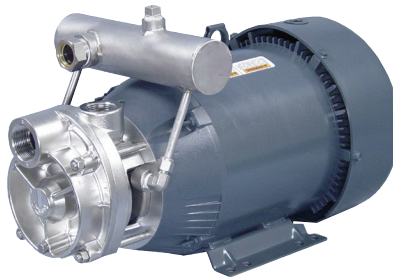

canned versions of many of our standard products such as the SM50, SL50, ST31, ST41, ST51, SP31, and more are coming. Other custom OEM sealless products utilize extended shaft vertical immersible or controlled leakage designs. We have also developed products for special centrifugal designs, DC applications in both sealless and sealed versions, disk friction centrifugal's, axial flow turbines for aerial firefighting, and submersible craft trim



and drain pumps. Other engineered products and accessories include the X41 Series of sealless canned chiller pumps, seal quench glands to extend seal life in difficult applications, special valves and suction strainers, mounting brackets, stainless steel tanks and systems, and custom piping trees and manifolds. For MTH customers, our advice is always: "if you don't see it, please ask."




While MTH Pumps' primary talents lie in engineering design, our efforts to meet and exceed customer specifications and satisfaction extend beyond the engineering and manufacturing arena. Special sourcing arrangements, construction materials, custom assembly, packaging, labeling, and testing services, quality surveillance, inventory stocking arrangements, and JIT shipping schedules are all a part of the solution that our existing customers have found in a valuable product partner that is MTH Pumps.



## MTH PUMPS

# Regenerative Turbine Education

The primary difference between a centrifugal and a regenerative turbine pump is that fluid only travels through a centrifugal impeller once, while in a turbine, it takes many trips through the vanes. Referring to the cross-section diagram, the impeller vanes move within the flow-through area of the water channel passageway.




Once the liquid enters the pump, it is directed into the vanes which push the fluid forward and impart a centrifugal force outward to the impeller periphery. An orderly circulatory flow is therefore imposed by the impeller vane which is converted to velocity. Fluid velocity (or kinetic energy) is then available for conversion to flow and pressure depending on the external system's flow resistance as diagrammed by a system curve.

It is useful to note at this point, that in order to prevent the internal loss of the pressure building capability of


an MTH regenerative turbine, close internal clearances are required. In many cases, depending on the size of the pump, impeller to casing clearances may be as little as one-thousandth of an inch on each side. Therefore, these pumps are suitable for use only on applications with clean fluids and systems, or else the fluid must be pre-filtered before reaching the pump.

Next, as the circulatory flow is imposed on the fluid and it reaches the fluid channel periphery, it is then redirected by the specially shaped fluid channels, around the side of the impeller, and back into the I.D.

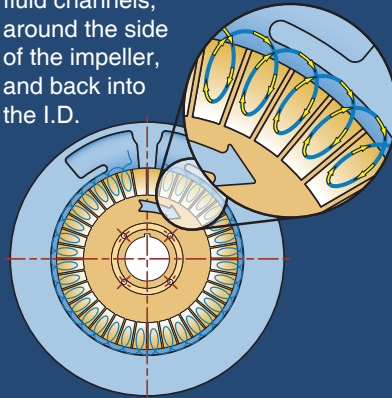

of the turbine impeller vanes, where the process begins again. This cycle occurs many times as the fluid passes through the pump. Each trip through the vanes generates more fluid velocity, which can then be converted into more pressure. The multiple cycles through the turbine vanes are called regeneration, hence the name regenerative turbine. The overall result of this process is a pump with pressure building capability ten or more times that of a centrifugal pump with the same impeller diameter and speed.

In some competitive designs, you will find that only a single-sided impeller is used. That design suffers from a thrust load in the direction of the motor that must be carried by the motor bearings. MTH turbines use a two-sided impeller design that builds pressure equally on both sides. This has the advantage of allowing the pump pressure to hydraulically self-center the impeller in the close clearance impeller cavity, while not burdening the motor bearings with excessive thrust loads.

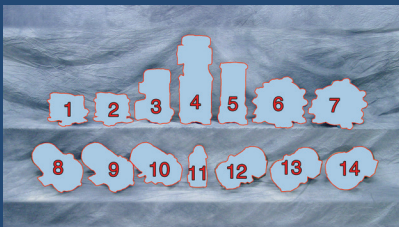

1. 240 • 280 Flex-coupled Pumps
2. 140 • 180 Series Pumps
3. T51 Flange Mounted Pumps
4. M50 • L50 Vertical Pumps
5. M51 Vertical Inline Pumps
6. 150 • 160 • 170 Series Pumps
7. 250 • 260 • 270 Series Pumps

8. T51 Close Coupled Pumps
9. E41 • T41 Close Coupled Pumps
10. T31 Close Coupled Pumps
11. P31 Close Coupled Pumps
12. C41 Centrifugal Pumps
13. C51 Centrifugal Pumps
14. C61 Centrifugal Pumps



**Manufacturing MTH Pumps  
in the USA since 1965**



# MTH PUMPS

401 West Main Street • Plano, IL 60545-1436  
Phone: 630-552-4115 • Fax: 630-552-3688  
Email: SALES@MTHPUMPS.COM  
WWW.MTHPUMPS.COM

**ISO 9001  
Registered Company**